


P-035




P-035B

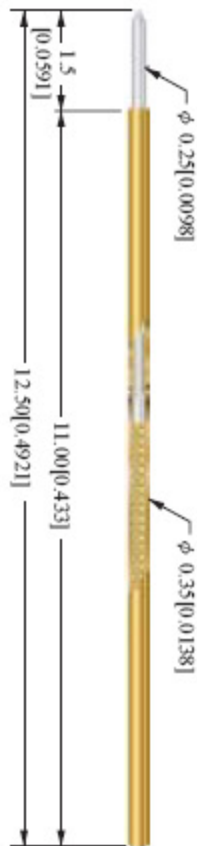

P-035F



P-035D



針軸 Plunger

高碳鋼鍍銻或鍍金
Sk4 [High Carbon Steel]
with Rhodium Plated or Gold Plated

內管 Barrel

磷青銅鍍金
Phosphor Bronze with Gold Plated

彈簧 Spring

琴鋼線鍍金
Music Wire with Gold Plated

外管 Receptacle

磷青銅鍍金
Phosphor Bronze with Gold Plated

最小中心距 Min.Center

0.70mm [0.0276]

最大行程 Full Stroke

1.5mm [0.059]

行程全壓彈力 (±20%)

Full Stroke Spring Force (±20%)
40g [1.41oz]

2/3行程彈力 (±20%)

2/3 Stroke Spring Force (±20%)
30g [1.06oz]

額定電流 Current Rating


0.5A (安培)

接觸電阻 Contact Resistance

130 mΩ (毫歐姆)

建議鑽孔尺寸 Recommended Hole Size
0.45~0.47mm [0.0177]~[0.0185]


R-035R [W]



Receptacle with Terminal Wire

尾端導線：鈎線、焊線

R-035R1 [C] [W]

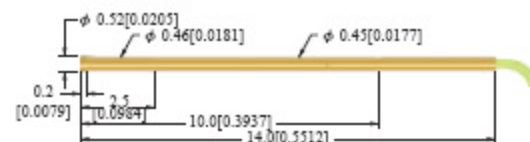

Wire Length:700mm

線長：700mm

● 規格變動不另行通知